

THIS DRAWING IS THE PROPERTY OF BROWNELL LTD. AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION

DRG No BL/D13073/01-03 INST
USED ON -

REMOVE ALL SHARP EDGES UNLESS SPECIFIED


THIRD ANGLE PROJECTION

DO NOT SCALE - ASK

DRAWING NUMBER	DESICCANT
BL/D13073/01	3-5MM NON INDICATING SILICA GEL
BL/D13073/02	3-5MM MOLECULAR SEIVES 4A
BL/D13073/03	3-5MM MOLECULAR SEIVES 13X

NOTE:

1. APPROX 1KG DESSICANT
2. MAX TEMPERATURE AT 0 BAR PRESSURE, 50°c
3. MAX PRESSURE AT 40°c, 15 BAR

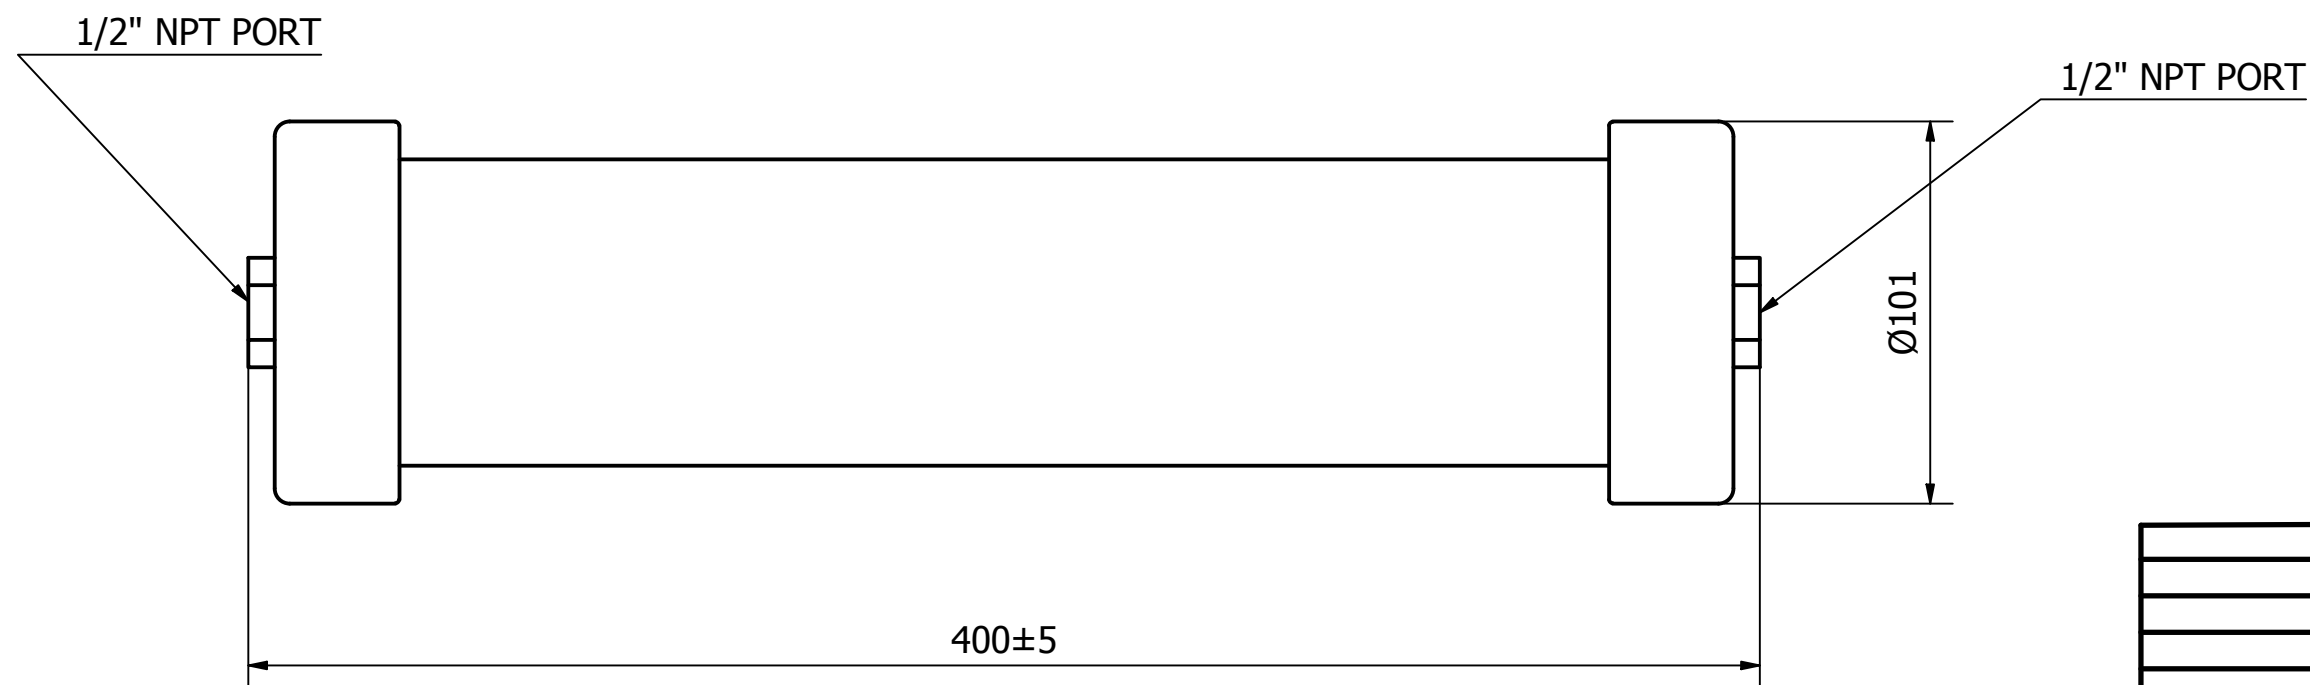

ORIGINAL		1	18/03/19
CHANGE	MOD No	ISSUE	DATE

MATERIAL ANODIZED 6082-T6 ALUMINIUM	PROTECTIVE FINISH BLACK ANODIZED	UNLESS OTHERWISE STATED	ANGULAR DIMS ± 0.5°	LINEAR DIMS 0 = ±0.5 0.0 = ±0.25 0.00 = ±0.05	BROWNELL Ltd. LONDON NW10 7XF	● RED DOT=ORIGINAL ● BLACK DOT=COPY	DRAWN	CHECKED
		SURFACE ROUGHNESS	3.2 µm (N8)	TITLE			DO	
EST. WT.	----	DIMENSIONS IN in/mm	mm	SCALE (ORIGINAL)	1:1	DRAWING NUMBER	BL/D13073/01-03 INST	

BROWNELL Ltd. LONDON NW10 7XF
 TITLE
 INLINE ALUMINIUM DESICCANT DRYER SIZE 2

● RED DOT=ORIGINAL
 ● BLACK DOT=COPY
 DRAWN DO
 CHECKED

DRAWING NUMBER
BL/D13073/01-03 INST