THIS DRAWING IS THE PROPERTY OF BROWNELL LTD,AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION

DRG No
BL/D13075/01-03 INST

USED ON -

REMOVE ALL SHARP EDGES UNLESS SPECIFIED

THIRD ANGLE PROJECTION

DO NOT SCALE - ASK

| DRAWING NUMBER | DESICCANT | INDICATOR CARD | MAX TEMPERATURE | MAX PRESSURE |
|---|---|---|---|---|
| BL/D13075/01 | 3-5MM NON INDICATING SILICA GEL | 30-50% RH | AT 0 BAR PRESSURE 50°C | AT 40°C 15 BAR |
| BL/D13075/02 | 3-5MM MOLECULAR SEIVES 4A | 15-30% RH | AT 0 BAR PRESSURE 50°C | AT 40°C 15 BAR |
| BL/D13075/03 | 3-5MM MOLECULAR SEIVES 13X | 15-30% RH | AT 0 BAR PRESSURE 50°C | AT 40°C 15 BAR |

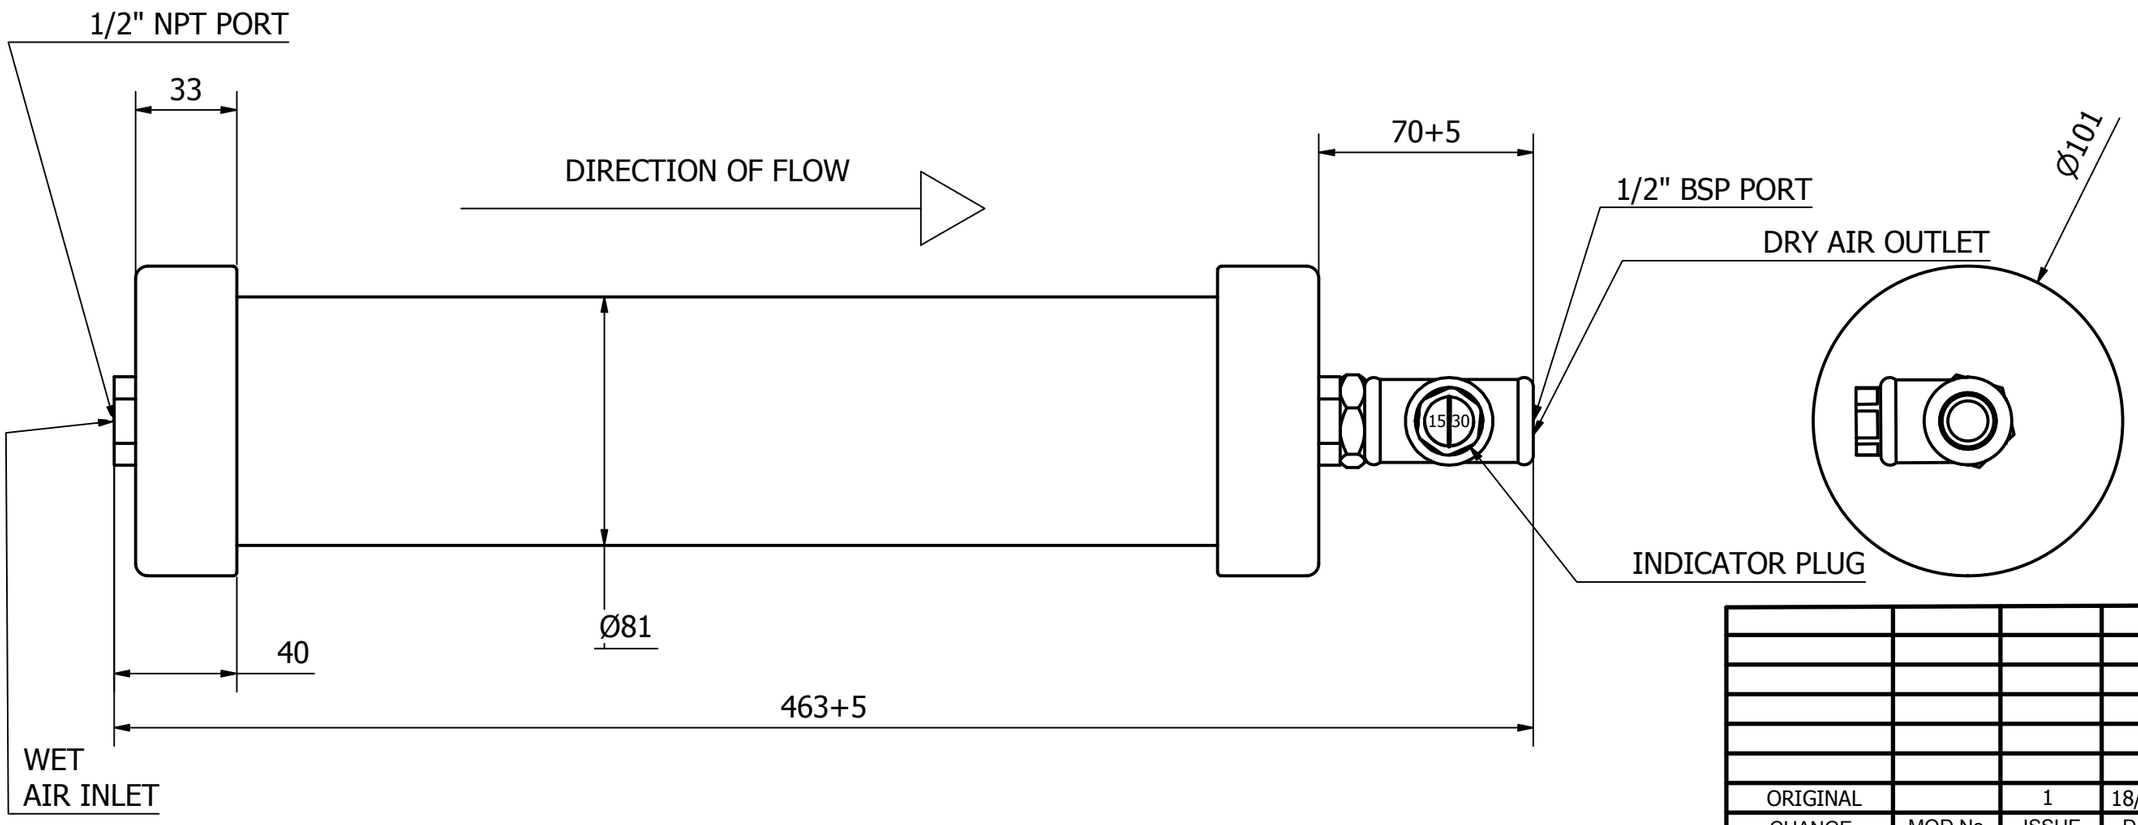


| | | | |
|---|---|---|---|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| ORIGINAL | | 1 | 18/03/19 |
| CHANGE | MOD No | ISSUE | DATE |

| | | | | | |
|---|---|---|---|---|---|
| MATERIAL: 6082-T6 ALUMINUIUM | PROTECTIVE FINISH: BLACK ANODIZED | UNLESS OTHERWISE STATED | ANGULAR DIMS: ± 0.5° | LINEAR DIMS: 0 = ± 0.5; 0.0 = ± 0.25; 0.00 = ± 0.05 | **BROWNELL Ltd. LONDON NW10 7XF** |
| EST. WT. ---- | | SURFACE ROUGHNESS | 3.2 µ m (N8) | | |
| | | DIMENSIONS IN in/mm | mm | | TITLE: INDICATING INLINE ALUMINIUM DESICCANT DRYER SIZE 2 |
| | | SCALE (ORIGINAL) | 1:1 | | DRAWING NUMBER: BL/D13075/01-03 INST |

RED DOT=ORIGINAL
BLACK DOT=COPY

DRAWN: DO

CHECKED: