



THIS DESIGN IS THE PROPERTY OF BROWNELL LTD. AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION.

DRG. No.
BL/D 2871 INST
USED ON

THIRD ANGLE PROJECTION

REMOVE ALL SHARP EDGES UNLESS SPECIFIED.

DO NOT SCALE - ASK.

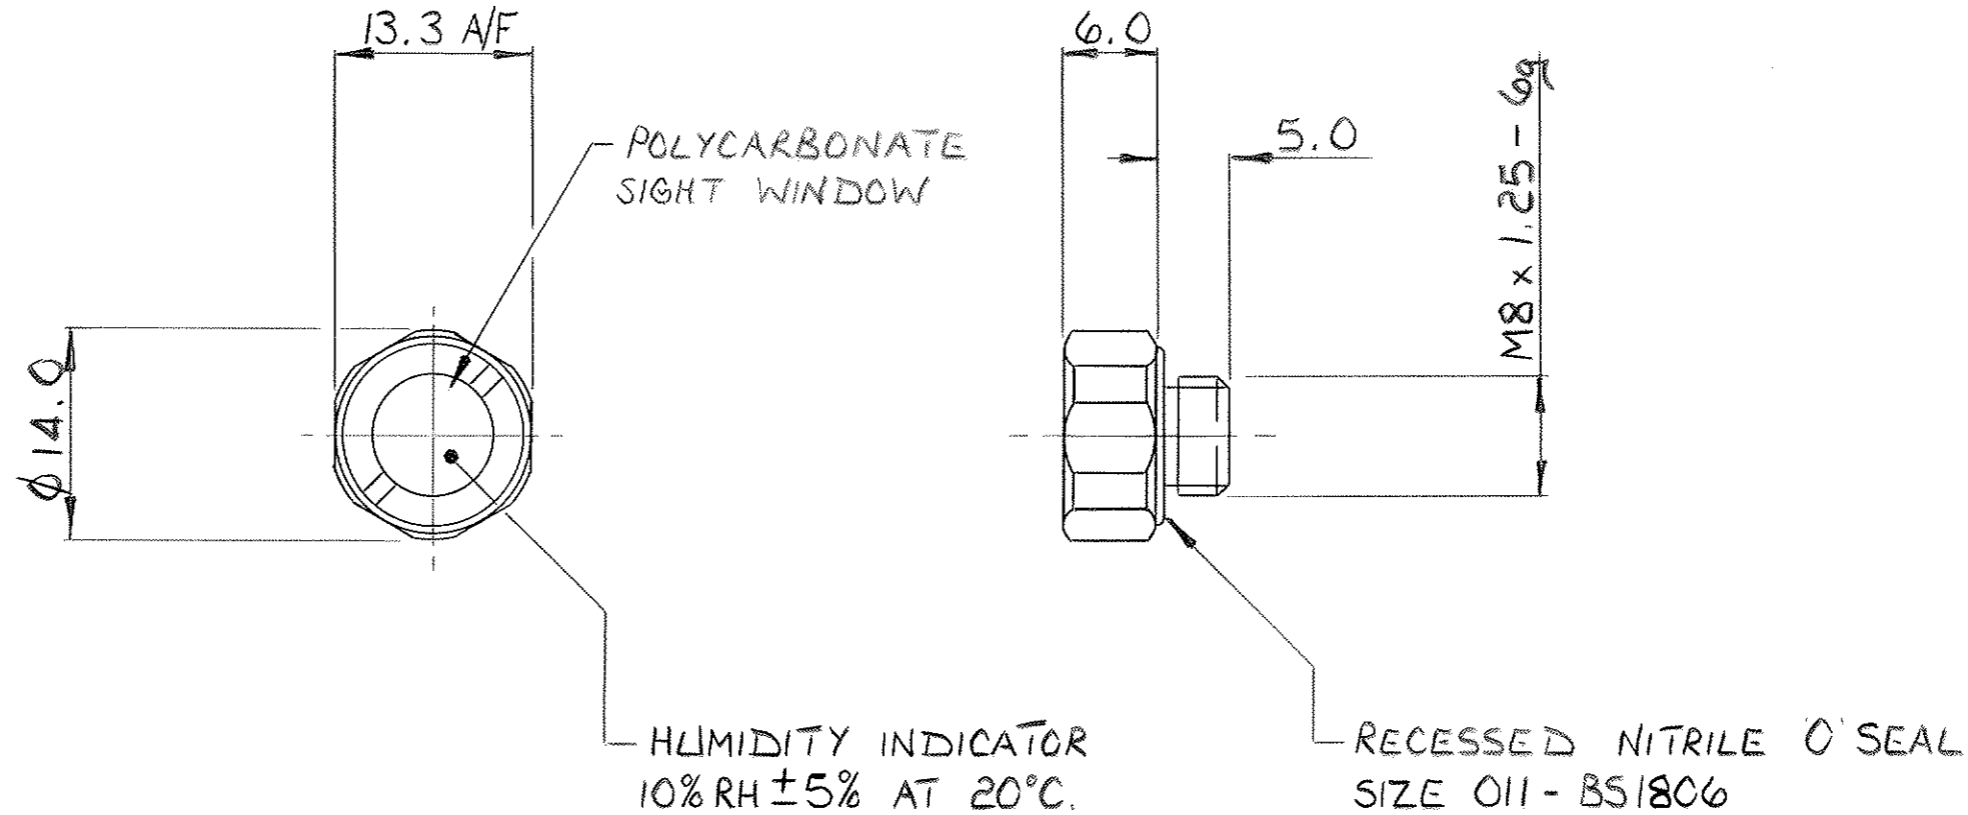

NOTES

1. CONFORMS TO DEF. STAN. 66-14 WHERE APPLICABLE.
2. TEMPERATURE RANGE -40°C MINIMUM TO +70°C MAXIMUM.
3. MAXIMUM LEAK RATE 1cc/HOUR AT 5 PSI.
4. MAXIMUM PRESSURE 10 PSI.

SIGHT WINDOW CHANGED	5053	5	23.4.97
REDRAWN	3870	4	25.7.90
CHANGE	MOD. No.	ISSUE	DATE

MATERIAL BRASS BS2874	PROTECTIVE TREATMENT NICKEL FLASH CAD & PAS	TOLERANCES UNLESS STATED ±0.5	BROWNELL LTD. LONDON, N.W.10.	CUSTOMERS REF.	DRAWN US	CHECKED LS
EST. WT. —		DIMNS. IN mm /m.m. SCALE (ORIGINAL) 2-1	TITLE 6685-99-651-6317 HUMIDITY INDICATOR PLUG	DRAWING No. BL/D 2871 INST		