

# Line of Cargo Dessicants Container Dri® II

## Container Dri® II



### Purpose

To protect cargo from the harmful effects of moisture damage during shipping via container, rail, or truck.

### What is it?


Container Dri® II is a line of specially designed cargo desiccants aimed at protecting cargo during shipping by aggressively absorbing moisture from the air. In doing so, Container Dri® II reduces dew point temperature (the temperature at which condensation begins to form, causing “container rain”), keeping cargo safe and dry.

The Container Dri® II line includes several configurations to best fit different needs and modes of transport.

### Why use it?


As goods move through intermodal systems, they are susceptible to damage from excessive moisture. Container Dri® II adds a level of protection by reducing dew point to avoid the accumulation of condensation. Container Dri® II absorbs up to three times its weight in moisture, and through an advanced formula, traps it as a thick, no-spill gel. Container Dri® II has the ability to protect shipments from start to finish, through all temperature ranges and relative humidity variances, and continues to reduce the relative humidity down to levels below 40 percent RH, which decreases the dew point temperature even further.

### Transport without dew point control

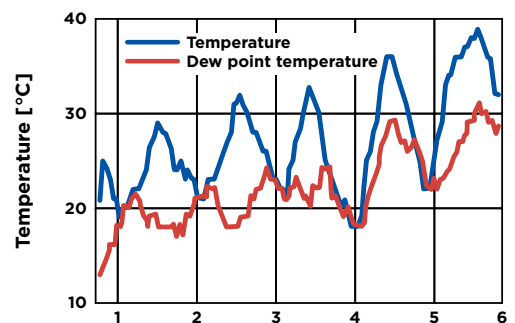

Condensation occurs when surface temperature and dew point temperature are equal.

### Transport with dew point control

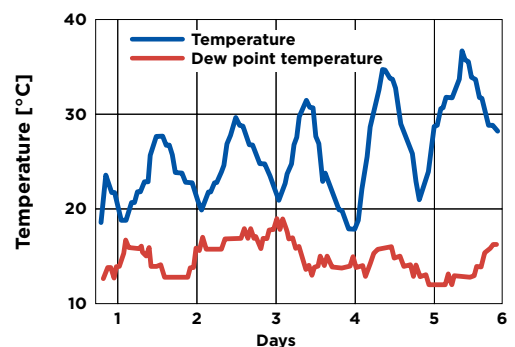

Dew point temperature is kept below surface temperature, preventing condensation and moisture damage.

# Container Dri® II Packaging and usage

## Available Configurations

Container Dri®II is available in several configurations to best accommodate different modes and methods of shipping. The number may vary depending on shipping conditions and the nature of the products being protected. Clariant works with customers to determine the optimal number of bags needed to protect goods for the duration of their journey.

### Absorption capacity (Approx. 125 g per bag:)

> 400 % or approx. 500 g H<sub>2</sub>O per bag at 95 % rel. humidity and 40 °C



**Container Dri® II**  
Bags either with or without adhesive backing  
B012660/26329127656  
255 x 145 mm, 125 g  
Usage recommendation  
40" Container: 60 – 90 pcs.



**Container Dri® II 6-Strip**  
Adhesive strips for installation onto the walls of shipping containers  
B012668/25225627656  
1520 x 145 mm, 750 g  
Usage recommendation  
40" Container: 10 – 15 pcs.



**Container Dri® II Blanket**  
3 x 4 125 g Adhesive with tapes  
B012140/25093827656  
430 x 235 mm, 1500 g  
Usage recommendation 40" Container: 5 – 8 pcs.

### Container Dri® II Pack 1500

Configured in a hard shell to be hung and suspended high in a container  
B012665/26013427690  
430 x 470 x 50 mm, 1500 g  
Usage recommendation 40" Container: 5 – 8 pcs.



### Container Dri® II Pack 750

Configured in a hard shell to be hung and suspended high in a container  
B012664/26013328915  
430 x 235 x 50 mm, 750 g  
Usage recommendation  
40" Container: 10 – 15 pcs.

This information corresponds to the present state of our knowledge and is intended as a general description of our products and their possible applications. Clariant makes no warranties, express or implied, as to the information's accuracy, adequacy, sufficiency or freedom from defect and assumes no liability in connection with any use of this information. Any user of this product is responsible for determining the suitability of Clariant's products for its particular application. \*Nothing included in this information waives any of Clariant's General Terms and Conditions of Sale, which control unless it agrees otherwise in writing. Any existing intellectual/industrial property rights must be observed. Due to possible changes in our products and applicable national and international regulations and laws, the status of our products could change. Material Safety Data Sheets providing safety precautions, that should be observed when handling or storing Clariant products, are available upon request and are provided in compliance with applicable law. You should obtain and review the applicable Material Safety Data Sheet information before handling any of these products. For additional information, please contact Clariant.

**\*For sales to customers located within the United States and Canada the following applies in addition:**  
NO EXPRESS OR IMPLIED WARRANTY IS MADE OF THE MERCHANTABILITY, SUITABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE OF ANY PRODUCT OR SERVICE.

© Trademark of Clariant registered in many countries  
© 2012 Clariant International Ltd



Clariant International Ltd



CLARIANT PRODUKTE  
(DEUTSCHLAND) GMBH  
Osterrieder Str. 15  
85368 Moosburg  
Germany

FUNCTIONAL MINERALS  
CARGO & DEVICE PROTECTION

Phone +49 8761 82-765  
Fax +49 8761 82-755

WWW.CLARIANT.COM/DESICCANTS  
WWW.CLARIANT.COM